

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
15 September 2005 (15.09.2005)

PCT

(10) International Publication Number  
**WO 2005/084914 A1**

(51) International Patent Classification<sup>7</sup>: **B29C 45/42,**  
45/72

**CORAN, Massimo** [IT/IT]; Via Colombo 32, I-31027  
Spresiano (IT).

(21) International Application Number:  
PCT/EP2005/050892

(74) Agents: **CINQUANTINI, Bruno** et al.; Notarbartolo &  
Gervasi S.p.A., Corso di Porta Vittoria 9, I-20122 Milan  
(IT).

(22) International Filing Date: 1 March 2005 (01.03.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
RM2004A000107 2 March 2004 (02.03.2004) IT

(71) Applicant (for all designated States except US): **S.I.P.A.**  
**Società Industrializzazione Progettazione e Au-**  
**tomazione S.p.A.** [IT/IT]; Via Caduti del Lavoro 3,  
I-31029 Vittorio Veneto (IT).

(72) Inventors; and


(75) Inventors/Applicants (for US only): **ZOPPAS, Matteo**  
[IT/IT]; Via XX Settembre, 122, I-31015 Conegliano (IT).

(81) Designated States (unless otherwise indicated, for every  
kind of national protection available): AE, AG, AL, AM,  
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,  
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,  
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,  
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,  
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,  
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ,  
TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA,  
ZM, ZW.

(84) Designated States (unless otherwise indicated, for every  
kind of regional protection available): ARIPO (BW, GH,  
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,  
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,  
FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO,

[Continued on next page]

(54) Title: DEVICE AND METHOD FOR CONDITIONING PLASTIC OBJECTS

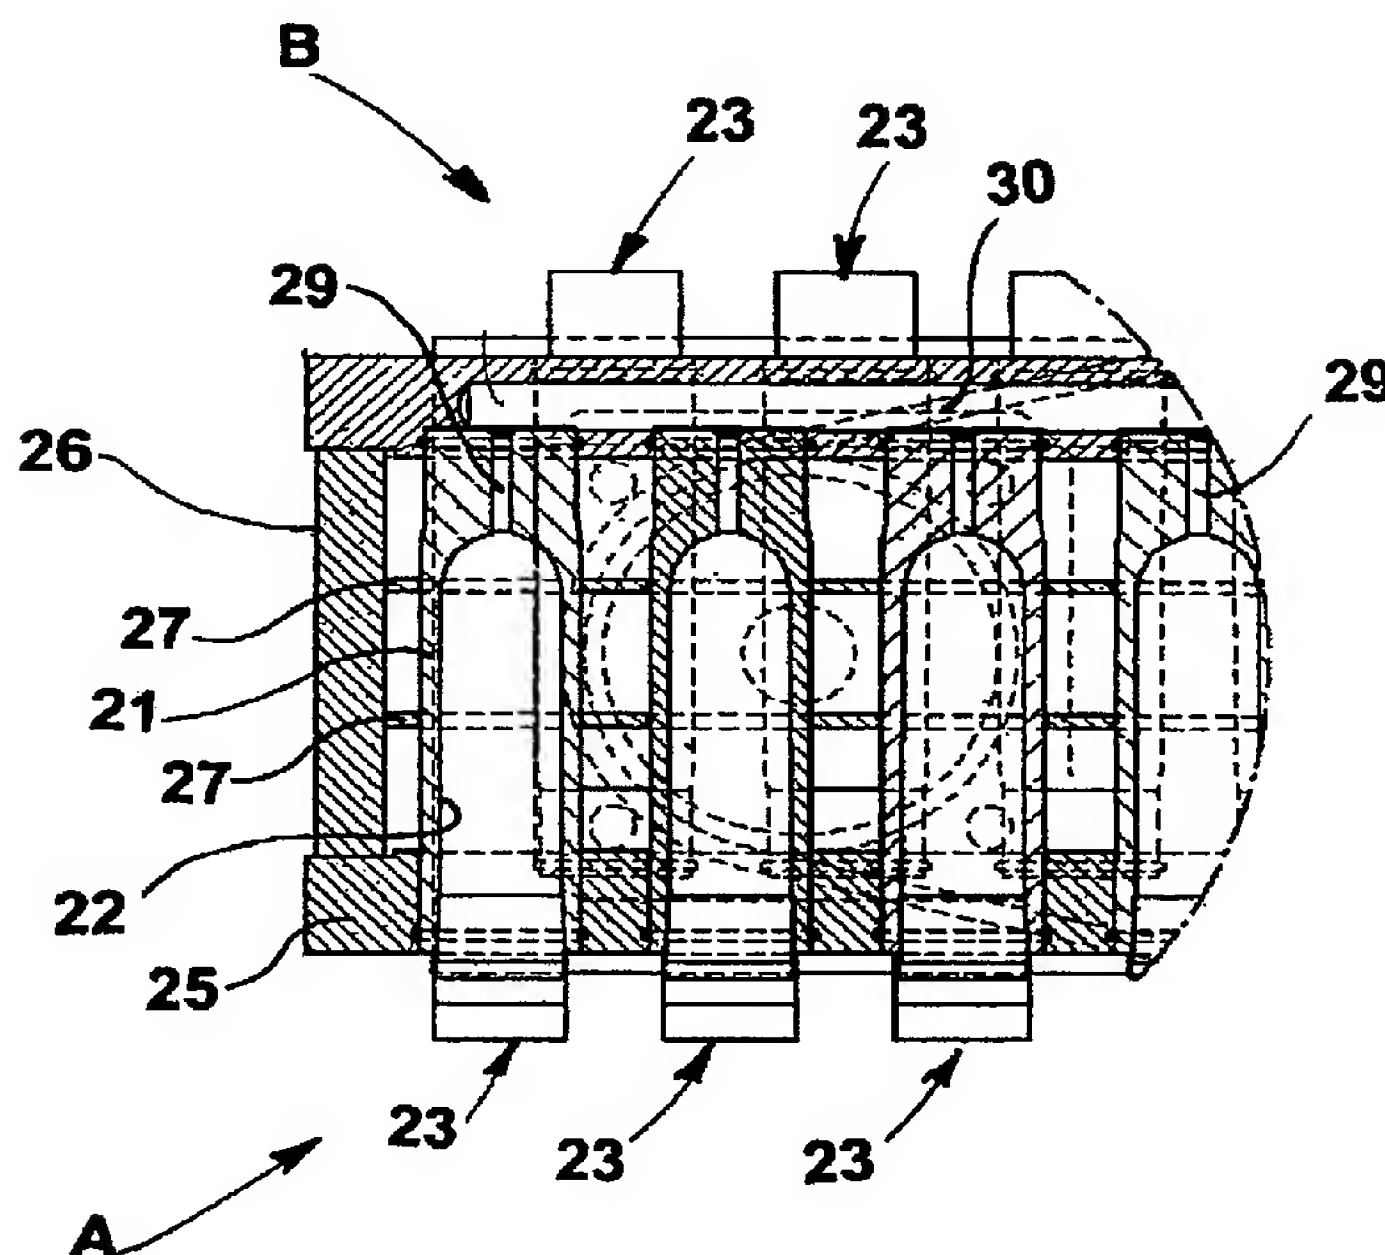

(57) Abstract: The device for conditioning preforms in plastic material comprises a rotating turret (20), having a group of conditioning cavities (22) for inserting preforms, partly through an opening on a first side (A) of the turret and partly through an opening on a second side (B) of the turret. The conditioning cavities (22) which open on the first side (A) are disposed in such a way that for part of their length (L1) they are situated side by side with the cavities which open on the second side (B). In this way the turret becomes more compact. There is also described a conditioning method for the preforms.

WO 2005/084914 A1



SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Declaration under Rule 4.17:**

— *of inventorship (Rule 4.17(iv)) for US only*

**Published:**

— *with international search report*

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*